

AQUAMAG

Defangatore filtro magnetico con valvola di chiusura impianto
Magnetic sludge remover with closing valve



AQUAMAG è il mini defangatore filtro magnetico con valvola di chiusura impianto incorporata e valvola di non ritorno. Per installazioni facili, rapide e salvaspazio (in meno di 4 cm di interasse) sotto le caldaie a condensazione. Grazie al brevetto interno vincola sempre il passaggio dell'acqua all'interno del II defangatore è piccolo, ma senza rinunciare all'effetto decantazione + filtrazione + campo magnetico + ciclone! Dotato di camera interna che isola il magnete e ne consente la pulizia dagli ossidi di ferro unicamente sfilandolo. la cartuccia (dove si trova il magnete).



AQUAMAG is the mini magnetic sludge remover with built-in plant closing valve and non-return valve. For easy, fast and space-saving installation (in less than 4 cm distance) under condensing boilers. Thanks to the internal patent it always constrains the passage of water inside the cartridge (where the magnet is located). The defangator is small, but without sacrificing the decantation effect + filtration + magnetic field + cyclone! Equipped with an internal chamber that isolates the magnet and allows its cleaning from iron oxides only by removing it.

-  **Con cartuccia da 500 micron in acciaio Inox/**
With 500 micron stainless steel cartridge
-  **Tipologia magneti: Neodimio a 11.000 Gauss/**
Magnet type: Neodymium at 11.000 Gauss
-  **Consigliato per caldaie fino a 35 Kw/**
Recommended for boilers up to 35 Kw
-  **Uso riscaldamento e condizionamento (90°C)/**
Heating and air conditioning (90 °C)

AQUAMAG


Product specifications



CODICE/ CODE	A8110000	
MODELLO/ MODEL	AQUAMAG	
MATERIALE/ MATERIAL	TESTA/ HEAD	TERMOPL/ THERMOPL.
	VASO/ SUMP	TERMOPL/ THERMOPL.
	CARTUCCIA/ CARTRIDGE	INOX/ STAINLESS
PORTATA/ FLOW RATE (ΔP=0,2BAR)	Lt/min.	30
P	BAR	7
INGRESSO- USCITA/ INLET- OUTLET	1/4"MF	
DIMENSIONI in mm/ DIMENSIONS in mm	A	90
	B	100
CAPACITA' FILTRANTE/ FILTERING CAPACITY	MICRON	500
TEMP. ACQUA MAX/ MAX WATER TEMP.	°C	90

Installazione 1/ Installation 1

- 1 FILTRO DEFANGATORE ORIZZONTALE/
HORIZONTAL SLUDGE REMOVER
- 2 RADIATORE IMPIANTO RISCALDAMENTO/
RADIATOR HEATING SYSTEM
- 3 GENERATORE DI CALORE/
HEAT GENERATOR

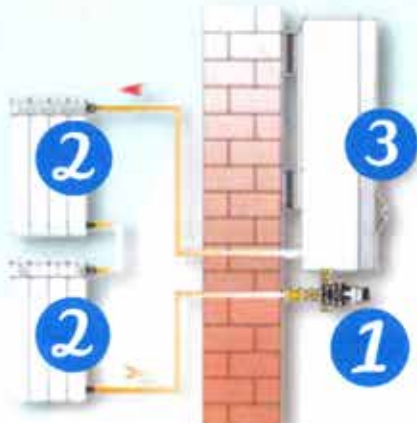

made in  italy

we are
industry & innovation