

05> contatori d'acqua con emettitore di impulsi

pulse-emitter water meters

A-CON




DESCRIZIONE

Dopo anni di esperienza sul campo abbiamo omologato una gamma completa di misuratori di portata con emettitori di impulsi integrati. I Misuratori di Portata si abbinano perfettamente alle pompe dosatrici modello PI per il dosaggio dei prodotti chimici proporzionale alla portata rilevata. Disponibili in vari modelli per misurare portate nominali dai 0,03mc/h a 650 mc/h.

CARATTERISTICHE TECNICHE

Calibro - Size - DN Gauge - Size - DN	mm	13	20	25	30	40	50
Portata massima Qmax (CEE) Qmax max. flow rate (CEE)	m³/h	3	5	7	10	20	30
Portata nominale QN (CEE) QN Nominal flow rate (CEE)	m³/h	1.5	2.5	3.5	5	10	15
Portata Minima Qmin (CEE) Minimun Flow Qmin (CEE)	l/h	30	50	70	100	200	450
Massima temperatura dell'acqua Minimun Working Temperature	°C	40	40	40	40	40	40
Massima pressione di lavoro Max Working Pressure	BAR	16	16	16	16	16	16
Emettitore impulsi Pulse emitter	4 imp/lt (k=0.25)						

DIMENSIONI

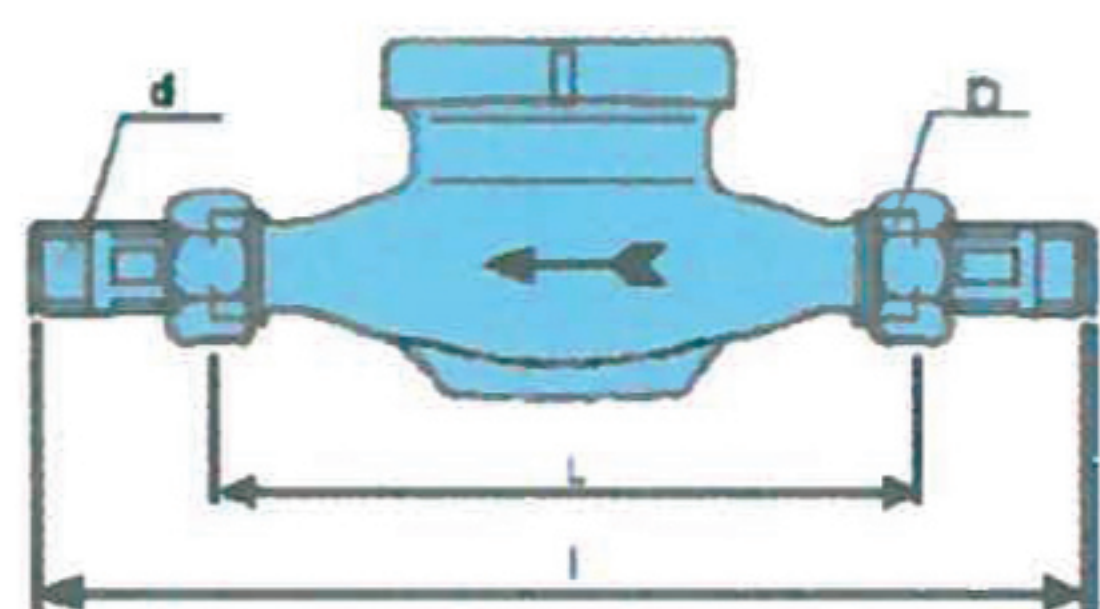

Codice Code	Modello Model	Connessioni Connections	D	DN	Qn	PN	L	I	Price (€)
		Ø mm	mm	mm	m³		mm	mm	
ADCONRC00	A-CON/C 1/2"	1/2"	3/4"	13	1.5	16	110	190	
ADCONRC01	A-CON/C 3/4"	3/4"	1"	20	2.5	16	130	230	
ADCONRC02	A-CON/C 1"	1"	1" 1/4	25	3.5	16	260	360	
ADCONRC03	A-CON/C 1 1/4"	1" 1/4	1" 1/2	30	5	16	260	380	
ADCONRC04	A-CON/C 1 1/2"	1" 1/2	2"	40	10	16	300	440	
ADCONRC05	A-CON/C 2"	2"	2" 1/2	50	15	16	300	460	

Codice Code	Modello Model	Connettore Connector	Ingresso-Uscita In-Out	Impulsi Pulses	Portata nom. Flow-rate norm.	Price (€)
					m³/h	
ADCONRC00	Connettore filettato Threaded water meter	HIRSMANN	G 1/2"	4 IMP/lt	1,5	
ADCONRC00OB	Connettore filettato Threaded water meter	BNC	G 1/2"	4 IMP/lt	1,5	
ADCONRC01	Connettore filettato Threaded water meter	HIRSMANN	G 3/4"	4 IMP/lt	2,5	
ADCONRC01OB	Connettore filettato Threaded water meter	BNC	G 3/4"	4 IMP/lt	2,5	
ADCONRC02	Connettore filettato Threaded water meter	HIRSMANN	G 1"	4 IMP/lt	3,5	
ADCONRC02OB	Connettore filettato Threaded water meter	BNC	G 1"	4 IMP/lt	3,5	
ADCONRC03	Connettore filettato Threaded water meter	HIRSMANN	G 1" 1/4	4 IMP/lt	5	
ADCONRC03OB	Connettore filettato Threaded water meter	BNC	G 1" 1/4	4 IMP/lt	5	
ADCONRC04	Connettore filettato Threaded water meter	HIRSMANN	G 1" 1/2	4 IMP/lt	10	
ADCONRC04OB	Connettore filettato Threaded water meter	BNC	G 1" 1/2	4 IMP/lt	10	
ADCONRC05	Connettore filettato Threaded water meter	HIRSMANN	G 2"	4 IMP/lt	15	
ADCONRC05OB	Connettore filettato Threaded water meter	BNC	G 2"	4 IMP/lt	15	